

HERITAGE BAY DVS™

SMALL DIRECT VENT INSERT & FIREPLACE



Heritage Bay DVS™ Fireplace Insert shown with 8" x 10" surround panels.



Heritage Bay DVS Fireplace installed with the Grand Mantle™ corner mantel and with the Classic Hearth™ tile surround and hearth pad.

THE SMALL HERITAGE BAY™ fireplace and fireplace insert by LOPI, provides a unique blend of contoured curves and flowing lines. The beautiful 24 karat gold plated door wraps around the fire instead of blocking your fireview. In addition, delicate cast aluminum molding creates a visually stunning fireplace that integrates hearth and home.

Both Heritage Bay DVS fireplace and insert are certified as a *Direct Vent Furnace*, distinguishing it from non-heating “*decorative*” gas appliances.

The Heritage Bay DVS fireplace is the ideal built-in heating solution. With it's direct vent design you can install this beautiful fireplace easily in your living room, bedroom, kitchen, or bath.
The Heritage Bay DVS fireplace insert is designed to transform your drafty, inefficient masonry or metal fireplace into an efficient, economical heat source.

The Heritage Bay DVS features a variable 31,000 BTU/hour burner that utilizes a unique two stage heat exchange system to achieve up to a remarkable 85%* efficiency.

The LOPI Heritage Bay DVS not only adds warmth, but compliments any decor. Standard equipment includes a powerful variable speed blower that allows heating up to 1,250 square feet. This makes the small Heritage Bay ideal for heating moderately sized homes, townhouses, or zonal heating in large homes.

* With maximum vent configuration



HERITAGE BAY DVS™ By LOPI (Small Direct Vent Fireplace & Insert)

- Starting the fire is simple with the push of a button or use the added convenience of either the optional wall thermostat, wall switch or remote control thermostat.
- Huge, true-bay viewing glass area - 252 sq. in.
- The Aluminized pan burner provides an incredibly realistic, "wood-burning" like fire.
- The hand-carved log set and glowing embers are patterned after an actual wood fire.
- Heater Rated - Either Heritage Bay DVS unit is so efficient that it can easily enhance your primary heat source.
- Quiet, 130 CFM convection blower is standard.
- The standing pilot millivolt system allows the Heritage Bay DVS to operate even during power outages.
- The Heritage Bay DVS ships with NG burner installed, and includes an easy-to-convert LP conversion kit.
- Heavy-duty construction and quality components are used throughout to ensure a lifetime of trouble-free home heating.
- A 30 second pilot drop-out is designed to shut the gas off in the fireplace if the pilot flame should ever go out.
- The Heritage Bay DVS comes standard with cast brick pattern floor. An optional brick pattern fireback is also available for the firebox sides.


Fuel	Overall Efficiency	BTU's (Adjustable)	AFUE	Heating Capacity*	Standing Pilot	Fireplace Venting	Insert Venting
Natural Gas (NG) or Propane (LP)	85% (NG) 85.5% (LP) (with maximum vent configuration) 80% (NG) 80.5% (LP) (with minimum vent configuration)	NG - 18,600 to 31,000 Btu's/Hr. LP - 16,000 to 31,000 Btu's/Hr.	71.3% NG 71.8% LP	Up to 1,250 Sq. Ft.	Generates Electricity to Allow Operation Even During Power Outages	6 5/8" DuraVent™ Co-Axial	3" Flex Duct

Gas appliance performance can be affected by prevailing atmospheric conditions. *Heating Capacity may vary depending on the degree of home insulation, floor plan and ambient temperature zone of the area in which you live.

This fireplace must be installed in accordance to installation manual. Improper installation of your gas appliance or failure to operate it according to the guidelines detailed in the Owner's Manual, may negate your warranty and endanger your home and family. Contact local building or fire officials about restrictions and installation requirements in your area.

Fireplace Insert Specifications

Height	19 1/8"	Panel Sizes: Note: All panel kits include brass trim and stand-offs.
Width	24 3/8"	Rectangular 8" x 10" Panels 28 7/8" H x 40 3/8" W
Depth	15 3/4"	Rectangular 10" x 12" Panels 31 7/8" H x 44 3/8" W
Flue Diameter	Two 3" Flex Ducts	Arched 8" x 10" Panels 33 3/8" H x 44 1/8" W (28 1/8" H at side)
Weight	150 lbs.	

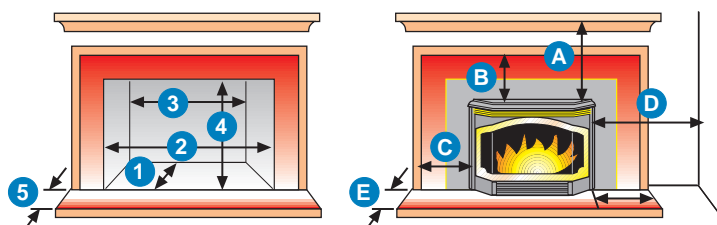

Sizing Your Fireplace

Please refer to insert clearance drawing above.

	Heritage Bay	Your Fireplace
1 = Fireplace Depth	15 3/4"	_____
2 = Width in Front	30 3/8"	_____
3 = Width in Back	16 3/8"	_____
4 = Fireplace Height	19 1/8"	_____
5 = Hearth Extension	5 3/8"	_____

* Includes the necessary space to connect gas line and air intake/exhaust venting.



Clearance to Combustibles

Please refer to insert clearance drawing above.

A = Face to Mantle	10"
B = Face to Top Facing	8"
C = Face to Side Facing	6"
D = Face to Side Wall	6"
E = Hearth Extension - Front	12"
F = Hearth Extension - Side	0"

Fireplace Specifications

Height	34 3/4"	Clearance to Combustibles Please refer to insert clearance drawing above.
Width	37"	A = Face to Mantle 17"
Depth	19 3/8"	B = Face to Top Facing 12"
Flue Diameter	6 5/8"	C = Face to Side Facing 6"
Weight	165 lbs.	D = Face to Side Wall 6"
		E = Hearth Extension - Front 12"
		F = Hearth Extension - Side 0"

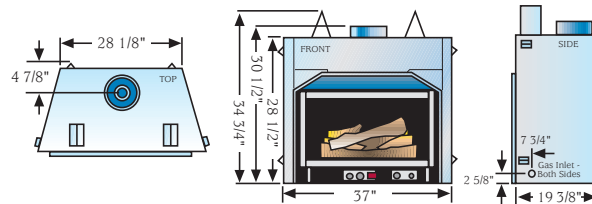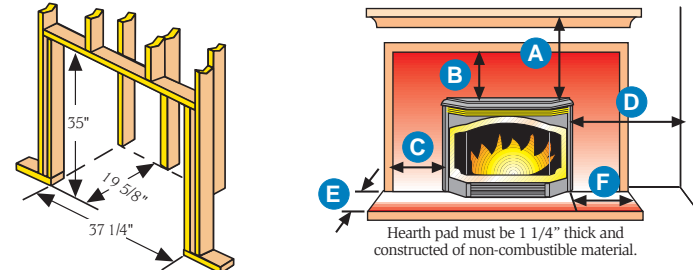

Safety Testing

Tested and certified by OMNI-Test Laboratories, Inc. to the combustion performance and construction requirements of ANSI Z21.88/CSA 2.33-1998, applicable sections of UL 307b, and CAN/CGA 2.17-M91.

Your Authorized LOPI Dealer Is Located At:



Visit our WEB site at: <http://www.lopistoves.com>

©Copyright 2000 Printed In U.S.A. Lopi reserves the right to alter or improve its products at any time without notification.